


ガラス飛散防止粘着フィルム /Anti-scattering adhesive film

HC1100SF-TP

構成/Construction

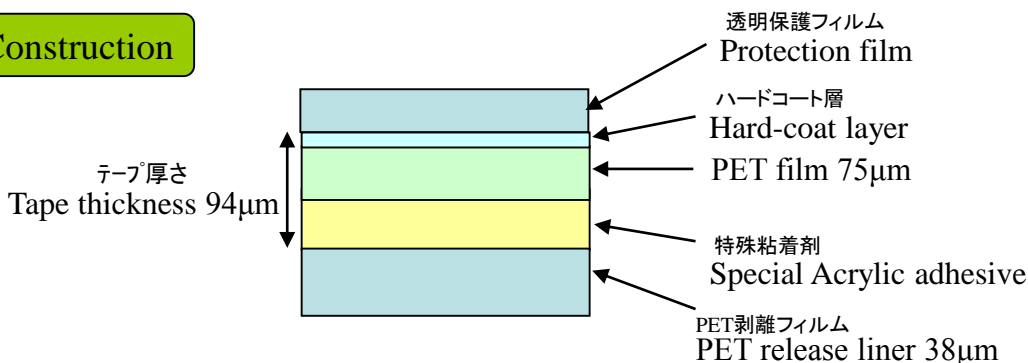

特徴/Characteristics

- ・表面硬度が高く耐擦傷性に優れます。
/Excellent hardness
- ・ハードコート表面の滑り性に優れます。
/Excellent slippery.
- ・ハードコート表面の指紋拭き取り性に優れます。
/Finger prints clean easily from panel surface

物性/Property

	Unit	HC1100SF-TP
接着力(強化ガラス) <i>Adhesion (Tempered glass)</i>	N/25mm	6.0
鉛筆硬度[粘着剤付き](JIS K5600-5-4) <i>Pencil hardness [with adhesive] Load:750g</i>	—	2H
耐摩耗性(スチールウール) <i>Wear resistance (Steel wool #0000,500g/cm²,)</i>	—	20,000回
全光線透過率 <i>Transparency (JIS K7361)</i>	%	91.0
ヘイズ <i>Haze (JIS K7136)</i>	%	0.5
滑り性 <i>Slippery</i>	—	<i>Excellent</i>
接触角 <i>Contact Angle</i>	度 Degree	108

サイズ/Size

最大幅/Max width: 960mm 標準長さ/STD Length: 100m

DIC株式会社 Information Equipment Materials Sales Div. <http://www.dic-global.com/ja/>

Items mentioned in this information are for customers' reference and limited to certain examples although they are based on the most reliable data obtained by our company. It is hoped that customers make the best use of these products after careful examination. Concerning to use and processing the products on this documents, it is not guaranteed a industrial ownerships of a third party. All recipes and processes should be modified, if necessary to conform with particular application.