


TECHNICAL INFORMATION

導電性両面粘着テープ / Electrically conductive double coated adhesive tape

DAITAC #8530AD-2

構成/Construction

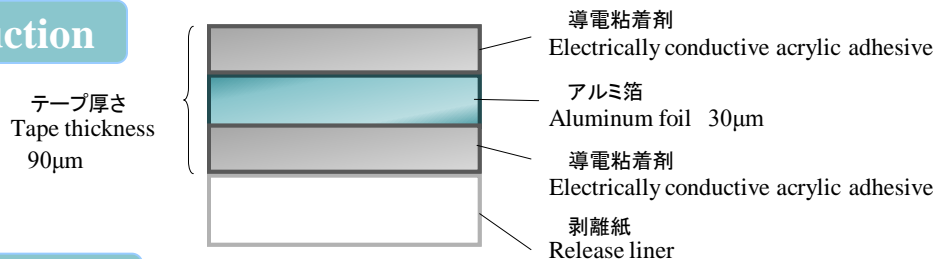

特徴/Characteristic

- ・厚み方向の導電性に優れます。 / Excellent electrical conductivity in thickness direction.
- ・接着性に優れます。 / Excellent adhesive strength.


用途/Application

- ・電子機器のEMI対策。 / For EMI shielding of electronic equipment.
- ・静電気除去用。 / For grounding static electricity.


物性/Property

	Units	#8530AD-2
テープ厚み Tape thickness	μm	90
接着力 Adhesion	(SUS) N/20mm (ABS) (PET)	9.8 10.3 9.8
抵抗値(加圧法) Electrical Conductivity :Pressure Method	Ω/6.25cm ²	0.03
抵抗値(貼付法) Electrical Conductivity :Attached Method	Ω/6.25cm ²	0.08
保持力 Holding power :70℃ 0.5kg	mm/h	24<
熱伝導率(積層法) Thermal conductivity	W/mk	2.3

Pressured method

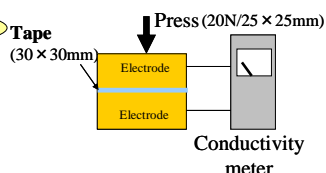

Attached method

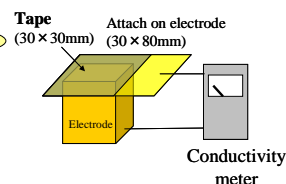

サイズ/Size

最大幅:1000mm 標準長さ:25m / 1000mm in max width / 25m in length