


Electrically conductive aluminum foil adhesive tape

DAITAC 52050AD-2

UL510FR certified FILE No:E-167390

Construction

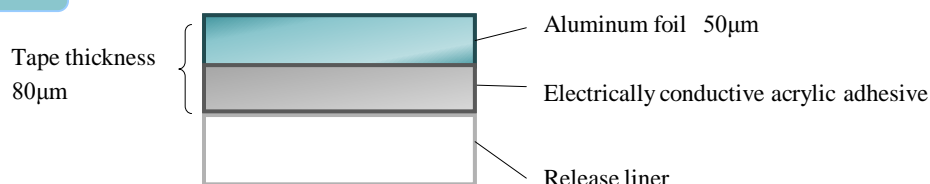

Characteristic


- Excellent electrical conductivity in thickness direction.
- Excellent adhesive strength.
- The six hazardous materials restricted by the RoHS directive are not compounded.

Application

- For EMI shielding of electronic equipment.

Property

	Units	52050AD-2
Tape thickness	µm	80
Adhesion (SUS)	N/25mm	14.7
Electrical Conductivity :Pressure Method	$\Omega/6.25\text{cm}^2$	0.05
Electrical Conductivity :Attached Method	$\Omega/6.25\text{cm}^2$	0.06
Holding power :70°C 0.5kg	h	24<

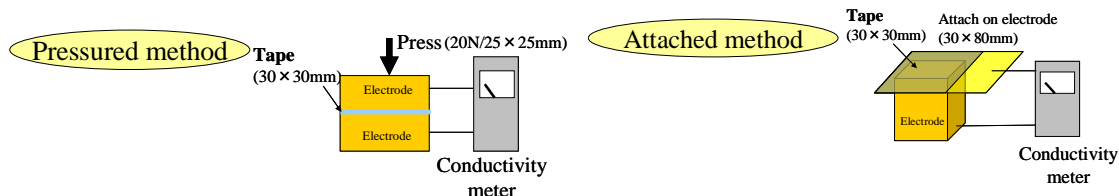

Size

- 1000mm in max width / 50m in length