


Aluminum foil adhesive tape

DAITAC 52000LA Series

UL510FR certified FILE No:E-167390

Construction

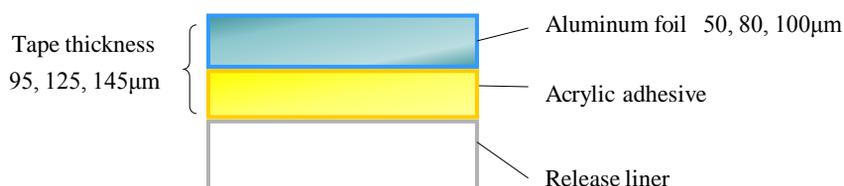

Characteristic

- Three thickness lineup.
- Excellent heat conductivity.
- Excellent adhesive strength.

Application

- For EMI shielding of electronic equipment.
- Heat spread application.

Property

	Units	52050LA	52080LA	52100LA
Tape thickness	µm	95	125	145
Adhesion (SUS) (Al) (ABS) (PS) (PC) (PP)	N/25mm	17.6	19.6	19.6
		16.0	16.0	18.6
		16.1	18.1	19.0
		16.2	18.6	18.6
		17.4	19.2	19.9
		15.4	17.2	17.9
Holding power :70°C 0.5kg	h	24<	24<	24<

Size

- 1000mm in max width / 50m in length