


TECHNICAL INFORMATION

Heat Resistance Adhesive Transfer Tape

DAITAC #8080

UL969 certified [File No.MH-12834]

CONSTRUCTION

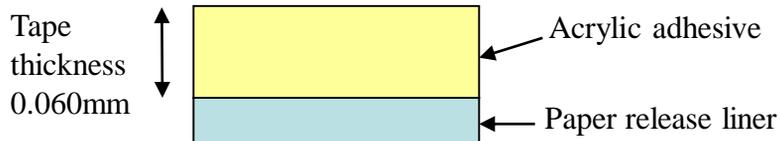

CHARACTERISTIC

- Carrier-less adhesive transfer tape.
- 150°C heat resistance.
- Excellent creep resistance even at high temperature.
- Good adhesion to various plastics and metals.
- The six hazardous materials restricted by the RoHS directive are not compounded.

APPLICATION

- For attaching materials of high-temperature applications.
- For attaching various kinds of materials and devices in electronics.

PROPERTY

		Unit	#8080
Peel strength at 180°angle	SUS	N/20mm	10.3
	PC		9.3
	ABS		9.3
	PMMA		8.3
Holding power 150°C,0.5kg	SUS	Days	> 20

STANDARD SIZE

1000mm in max width / 50m in length