


# TECHNICAL INFORMATION

Type of not using toluene and xylene

Black double-sided adhesive tape

## DAITAC #810TB

### CONSTRUCTION

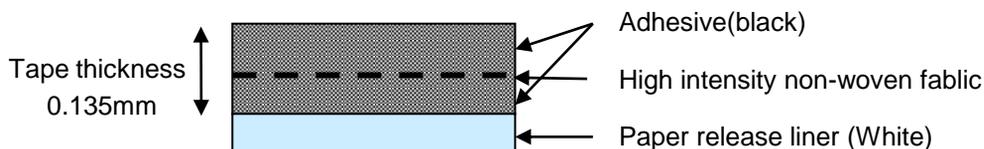

### CHARACTERISTIC

- Not use Toluene and xylene
- Excellent adhesion to various plastic material and metal
- Good workability

### APPLICATION

- For bonding a variety of materials in the electrical industry
- For bonding various forms and felts in the automotive

### PROPERTY

	Unit	#810TB
Peel strength at 180° angle SUS HIPS PC/ABS SUS	N/20mm	15.2 14.1 14.1 14.3
Holding power (40°C, 1kg)	mm/1hr	<2
Adhesive strength at 90° angle and constant stress (23°C/0.3kg/10mm)	mm/1h	13

### SIZE

MAX width.1060mm

DIC Corporation Composite Material Product div. <http://www.dic-global.com/en/>

Items mentioned in this information are for customers' reference and limited to certain examples although they are based on the most reliable data obtained by our company. It is hoped that customers make the best use of these products after careful examination. Concerning to use and processing the products on this documents, it is not guaranteed a industrial ownerships of a third party. All recipes and processes should be modified, if necessary to conform with particular application.