


Toluene and xylene free double coated adhesive tape

DAITAC #815AT

CONSTRUCTION

Tape thickness
0.10mm

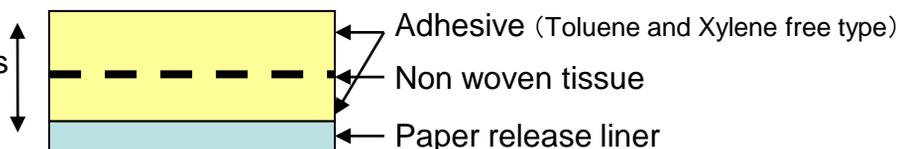

CHARACTERISTIC

- Not use Toluene and xylene.
Fourteen chemical substances specified by Ministry of Health, Labour and Welfare (Japan) are all free for materials.
- Good adhesion to various materials

APPLICATION

- For interior materials of Automobile
- For bonding polyurethane foam, polyethylene foam
- For various interior building materials (with the adhesive agent)
- For many kind of parts used in electrical and electronics industry

PROPERTY

		unit	#815AT
Peel strength at 180° angle	SUS	N/20mm	14.0
	PC		14.0
	ABS		13.0
	PP		10.0
Holding power	(40°C, 1kg)	mm/h	1.5>
Ball tack		No.	8

STANDARD SIZE 1060 mm in max width / 50 m in length