


Excellent initial adhesion Double Coated Adhesive Tape

DAITAC #815GT

UL969 certified [File No.MH-12834]

CONSTRUCTION

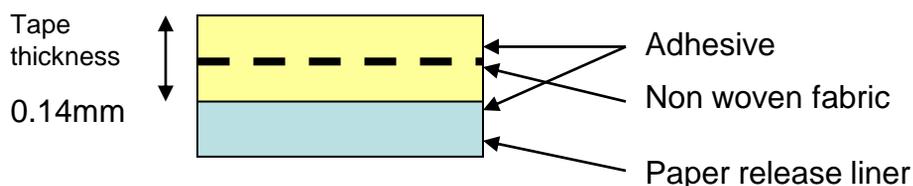

CHARACTERISTIC

- Excellent adhesion to various plastic material and metal
- Excellent initial adhesion and low-temperature adhesion
- Good repulsion resistance
- The six hazardous materials restricted by the RoHS directive are not compounded

APPLICATION

- For bonding a variety of materials in the automotive and electrical industry
- For bonding various foams and felts

PROPERTY

		Unit	# 8 1 5 G T
Peel strength at 180° angle	SUS	N/20mm	1 3 . 7
	ABS		1 4 . 0
	PC		1 3 . 2
	PP		1 2 . 4
Holding power (40°C, 1kg)		mm/h	2 >
Ball tack		No	1 2

STANDARD SIZE

1060mm in max width / 50m in length