


Thin type Foam Based Double Coated Adhesive Tape

## DAITAC #8402TD

### Construction

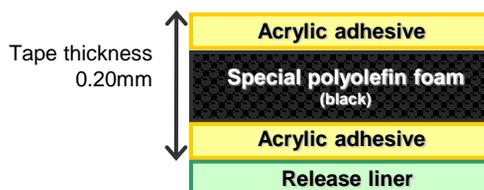

### Characteristics



- ◆ Not use fourteen chemical substances, include Toluene and Xylene, specified by Ministry of Health, Labor and Welfare (Japan).
- ◆ Excellent adhesion and durability
- ◆ Good adhesion to rough surface
- ◆ Good workability for die-cut and lamination

### Applications

For bonding rigid materials such as reinforced plastic, metal, and glass panel

### Properties

		Unit	#8402TD
<b>Tape thickness</b>		[μm]	<b>200</b>
<b>Peel strength</b> (Conform to JIS Z0237)	SUS (hairline)	[N/20mm]	<b>15.0</b>
	PC		<b>15.0</b>
<b>Holding power</b> (Conform to JIS Z0237)	70°C 500g/4cm <sup>2</sup>	[hour]	<b>24&lt;</b>

### Size

980mm in max width / 50m in length