


Thin type Foam Based Double Coated Adhesive Tape

## DAITAC #84030SP

### Construction

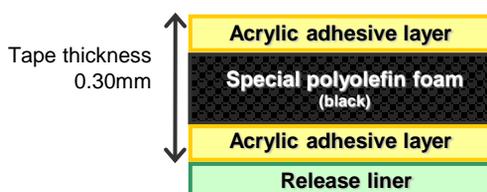

### Characteristics

- ◆ Excellent high impact resistance
- ◆ Good adhesion to rough surface
- ◆ Good workability for die-cut and lamination
- ◆ Easily-removable
- ◆ Excellent adhesion and durability

### Applications

For water-proof equipments such as mobile phone, tablet PC, and digital camera

For bonding rigid materials such as reinforced plastic, metal, and glass panel

### Properties

		Unit	#84030SP
<b>Tape thickness</b>		[μm]	<b>300</b>
<b>Peel strength</b> (Conform to JIS Z0237)	<b>SUS (hairline)</b>	[N/20mm]	<b>16.5</b>
	<b>ABS</b>		<b>15.0</b>
<b>Push adhesive strength</b> (DIC method)	<b>ABS</b>	[N/4cm <sup>2</sup> ]	<b>150</b>
<b>Holding power</b> (Conform to JIS Z0237)	<b>70°C</b> <b>500g/4cm<sup>2</sup></b>	[hour]	<b>24&lt;</b>
<b>Impact resistance</b> (DIC method)	<b>ABS</b> <b>300g</b>	Height [cm]	<b>100&lt;</b>
<b>Waterproof</b> (Conform to JIS C0920, IPX7)	<b>Flat surface</b>	1m 30min	<b>Good</b>
	<b>凸凹 (30μm)</b>		<b>Good</b>

### Size

Please ask our staff