


## Foam Based Double Coated Adhesive Tape

### DAITAC #8404TD Black

#### CONSTRUCTION

Tape Thickness  
0.4 mm

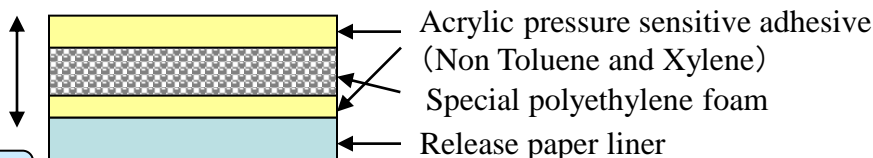

#### CHARACTERISTIC



- Non Toluene and Xylene.
- Not use fourteen chemical substances specified by Ministry of Health, Labour and Welfare (Japan).
- Excellent peel strength and push strength
- Excellent conformability
- Good workability

#### APPLICATION

- For emblems, panels, various building materials
- For exterior parts of automobiles like side visor
- For various interior parts of automobiles

#### PROPERTY

	Unit	#8404TD Black
Thickness	mm	0.4 (0.3~0.42)
Peel strength at 180° angle	SUS PP N/20mm	19.6 11.8
Shear adhesive strength	SUS/SUS N/cm <sup>2</sup>	83
Holding Power (40°C, 1kg)	mm/hr.	2 >
Quantity of Toluene	μg/100cm <sup>2</sup>	1.6

#### STANDARD SIZE

980mm in max width / 10m, 30m in length

※Semi Standard Product

DIC Corporation Composite Material Product div. <http://www.dic-global.com/en/>

Items mentioned in this information are for customers' reference and limited to certain examples although they are based on the most reliable data obtained by our company. It is hoped that customers make the best use of these products after careful examination. Concerning to use and processing the products on this documents, it is not guaranteed a industrial ownerships of a third party. All recipes and processes should be modified, if necessary to conform with particular application.