


Ultra thin electrically conductive double coated adhesive tape

DAITAC #8506ADW-10-H2

Construction

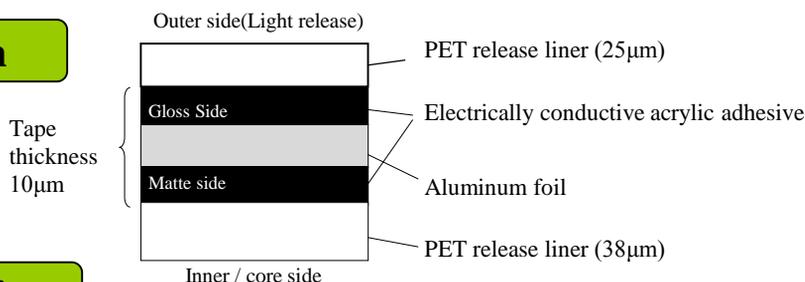

Characteristic

- Ultra thin! Tape thickness is 10µm.
- Excellent electrical conductivity in XYZ direction.
- Good adhesive strength.


Application

- For grounding static electricity.
- For EMI shielding of electronic equipment.


Property

	Units	#8506ADW-10-H2
Tape thickness	µm	10
Adhesion (SUS)	N/20mm	5.0
Electrical Conductivity :Pressure Method	Ω/6.25cm ²	0.02
Electrical Conductivity :Attached Method	Ω/6.25cm ²	0.02
Holding power :100 °C100g	h	24<

Pressured method



Attached method



※ Please consult with sales staff about tape size.