


Electrically conductive non-woven fabric base double coated adhesive tape

DAITAC #8520FDW-50

Construction

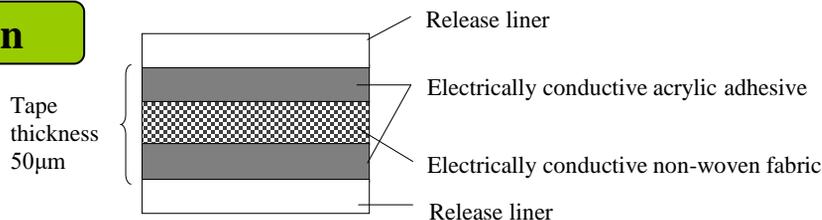

Characteristic

- Flexible non-woven fabric base makes bending better.
- Good electrical conductivity in thickness direction.
- Excellent adhesive strength .

Application

- For grounding static electricity.
- For EMI shielding of electronic equipment.

Property

	Units	#8520FDW-50
<i>Tape thickness</i>	µm	50
<i>Adhesion (SUS)</i>	N/20mm	9.0
<i>Holding Power(100°C100g)</i>	h	24<
<i>Electrical Conductivity :Pressure Method</i>	$\Omega/6.25\text{cm}^2$	0.007
<i>Electrical Conductivity :Attached Method</i>	$\Omega/6.25\text{cm}^2$	0.01

