


# TECHNICAL INFORMATION

## Electrically conductive double coated adhesive tape

# DAITAC #8530AD-2

### Construction

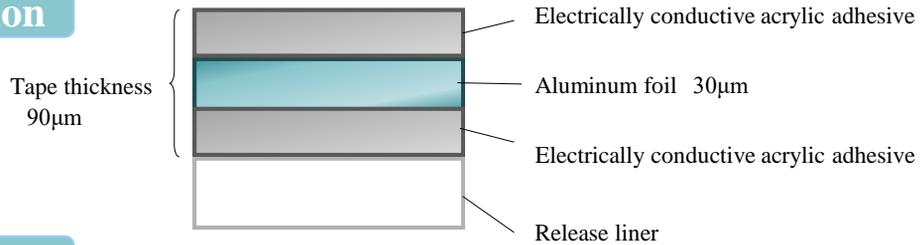

### Characteristic



- Excellent electrical conductivity in thickness direction.
- Excellent adhesive strength.

### Application

- For EMI shielding of electronic equipment.
- For grounding static electricity.

### Property

	Units	#8530AD-2	
Tape thickness	µm	90	
Adhesion	(SUS)	9.8	
	(ABS)	N/20mm	10.3
	(PET)		9.8
Electrical Conductivity :Pressure Method	$\Omega/6.25\text{cm}^2$	0.03	
Electrical Conductivity :Attached Method	$\Omega/6.25\text{cm}^2$	0.08	
Holding power :70°C 0.5kg	mm/h	24<	

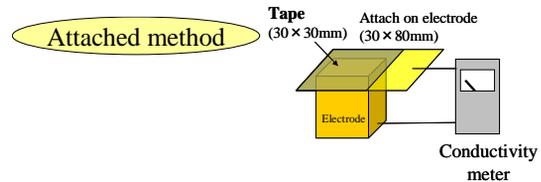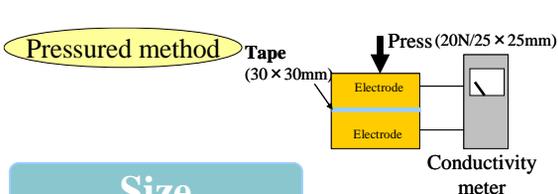

### Size

- 1000mm in max width / 50m in length