


Polyester Film Based Double Coated Adhesive Tape

DAITAC #8606TN

CONSTRUCTION

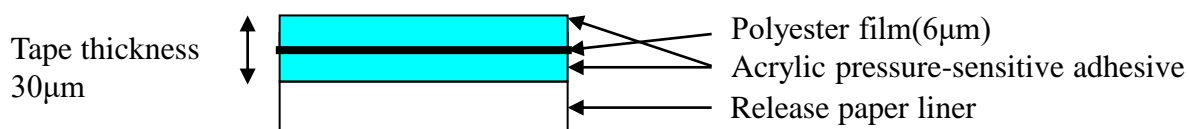

CHARACTERISTIC

- Extra thin
- Good initial adhesion
- Good for die cutting

APPLICATION

For peripheral materials of LCD module

PROPERTY

	unite	#8606TN
Peel strength SUS		7.0
At 180° angle AC	N/20mm	13.3
(JIS Z0237) ABS		8.0
Adhesive strength at 90°C angle and constant stress	mm/hr	3
Holding Power (40°C, 1kg)	mm/hr	2>
Reworkability (23°C, 1week)		Good

STANDARD SIZE

1000mm in max width / 50m in length

DIC Corporation Composite Material Product div. <http://www.dic-global.com/en/>

Items mentioned in this information are for customers' reference and limited to certain examples although they are based on the most reliable data obtained by our company. It is hoped that customers make the best use of these products after careful examination. Concerning to use and processing the products on this documents, it is not guaranteed a industrial ownerships of a third party. All recipes and processes should be modified, if necessary to conform with particular application.