


*Excellent Adhesive Strength and Removability Double Coated Adhesive Tape*

## DAITAC #8616CH

### CONSTRUCTION

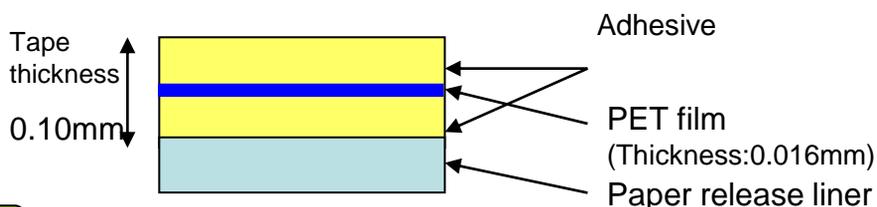

### CHARACTERISTIC

- Excellent adhesion and excellent removability from various plastic-materials and metals
- PET film backing provide high tensile strength and dimensional stability

### APPLICATION

- For bonding various recyclable materials in the office automations

### PROPERTY

		Unit	# 8 6 1 6 C H
Peel strength at 180° angle (JIS Z-0237-2000)	SUS ※ PC/ABS	N/20mm	1 3 . 5 1 3 . 0
Holding power (JIS Z-0237-2000)	70°C, 0.5kg	mm/1hr	2 4 <
Tensile strength	MD CD	N/20mm	7 1 . 0 8 8 . 0
Removability After 7 days at 60 °C · 90%RH	Galvanized steel ABS HIPS		Good Good Good
Surface resistance		Ω	10 <sup>12</sup> <
Removability			Good

※SUS: Hairline surface

### STANDARD SIZE

1 0 0 0 mm in max width / 5 0 m in length

DIC Corporation Composite Material Product div. <http://www.dic-global.com/en/>

Items mentioned in this information are for customers' reference and limited to certain examples although they are based on the most reliable data obtained by our company. It is hoped that customers make the best use of these products after careful examination. Concerning to use and processing the products on this documents, it is not guaranteed a industrial ownerships of a third party. All recipes and processes should be modified, if necessary to conform with particular application.