


Toluene and xylene free, and Removability Double Coated Adhesive Tape

DAITAC #8616TDR

LOW VOC Adhesive Tape

CONSTRUCTION

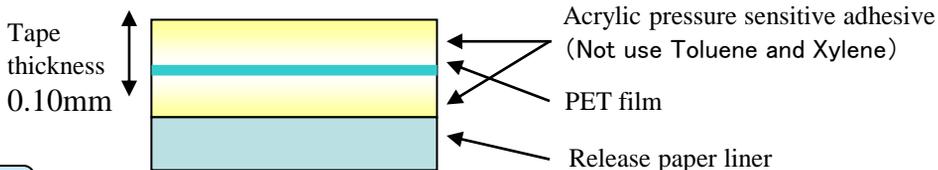

CHARACTERISTIC



- Not use Toluene and Xylene.
- Not use fourteen chemical substances specified by Ministry of Health, Labour and Welfare (Japan).
- Excellent removability from various plastic and metal
- Dimensional stable backing provides excellent stability at tape application

APPLICATION

- For many kind of parts used in electrical and electronics industry
- For mounting various recyclable materials in the industrial applications

PROPERTY

		Unit	#8616TDR
Peel strength at 180° angle 23°C1h	SUS	N/20mm	15.0
	Galvanized steel		14.0
	PC/ABS		16.0
	PP		13.0
Holding power	70°C 500g/4cm ²	Hours	Over 24
Tensile strength 23°C	Machine direction	N/20mm	71
	Cross direction		88
Removability After 7days at 60°C90%rh	Galvanized steel	-	Good
	PC/ABS		Good

STANDARD SIZE

1 0 0 0 mm in max width / 5 0 m in length