


TECHNICAL INFORMATION

Polyester Film Based Thin Double Coated Adhesive Tape

DAITAC #8616UJ-50-2

CONSTRUCTION

Tape thickness
50μm

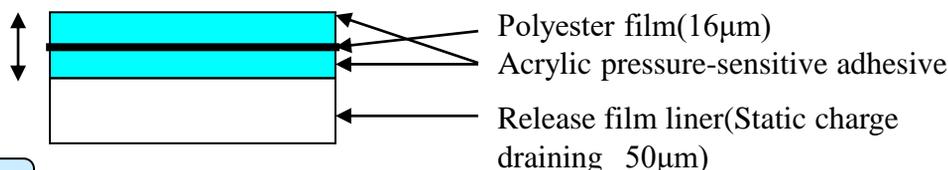

CHARACTERISTIC

- Very thin
- Very strong adhesion
- Antistatic release film liner
- Smoothness, distinct stability and repulsion resistance

APPLICATION

Joining LCD panel to back light module for mobile electronic equipment

PROPERTY

		unit	# 8 6 1 6 U J -50-2
Peel strength at 180° angle	S U S	N/20mm	13.0
	P C		13.5
	A B S		12.0
	P M M A		12.5
	P E T		13.0
Holding power (40°C, 1kg)		mm/h	1 >
Transmittance of visible rays		%	85 <

STANDARD SIZE 1 0 0 0 mm in max width / 5 0 m in length

ATTENTION

The trace of air bubble may be visible on an adhesive surface.
This product is not suitable for the use requiring high transparency.