


Polyester Film Based Double Coated Adhesive Tape

DAITAC #8616UJ Black-50 (N)

CONSTRUCTION

Tape thickness
50 μ m

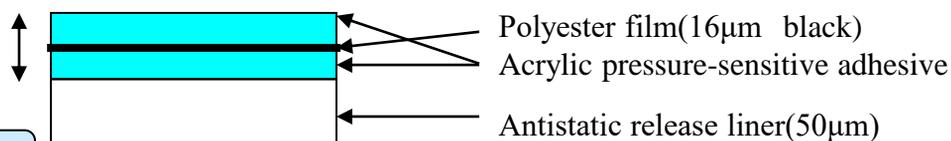

CHARACTERISTIC

- Not use halogenide compounds
- Very strong adhesion, excellent holding power
- Excellent light-shielding power
- Antistatic release film liner
- Smoothness, distinct stability, repulsion resistance

APPLICATION

Joining LCD panel to back light module for mobile electronic equipment

PROPERTY

		unit	#8616UJ Black-50(N)
Thickness		μ m	50
Peel strength	SUS	N /20mm	13.0
at 180° angle	PC		13.5
(JIS Z0237)	ABS		12.0
	PMMA		12.5
	PET		13.0
Holding power(40°C, 1kg)		mm/h	1 >
Transmittance of visible ray (JIS K7105)		%	0.1 >

STANDARD SIZE

1000mm in max width / 50m in length