


TECHNICAL INFORMATION

PET film backing Double Coated Adhesive Tape

DAITAC #8616V

UL969 certified [File No.MH-12834]

CONSTRUCTION

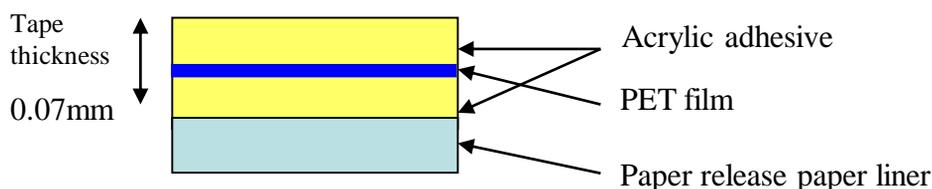

CHARACTERISTIC

- Strong adhesion type, PET film backing double coated adhesive tape .
- PET film backing provide high tensile strength and dimensional stability
- Excellent adhesion to various plastic materials and metals.
- The six hazardous materials restricted by the RoHS directive are not compounded.

APPLICATION

- For bonding a variety of materials in the office automations.

PROPERTY

		unit	#8616V
Peel strength at 180° angle (JIS Z-0237-2000)	SUS ※	N/20mm	13.0
	PC / ABS		12.0
Holding power (JIS Z-0237-2000)	70°C, 500g/4cm ²	h	24<
Tensile strength	MD	N/20mm	71.0
	CD		88.0
Adhesive strength at 90° angle and constant stress (DIC method)	SUS/40°C	mm/hr.	9

※SUS : hairline surface

STANDARD SIZE

1 0 0 0 mm in max width / 5 0 m in length