


TECHNICAL INFORMATION

Silicone/Acrylic Double Coated Adhesive Tape

DAITAC #8625HPW

CONSTRUCTION

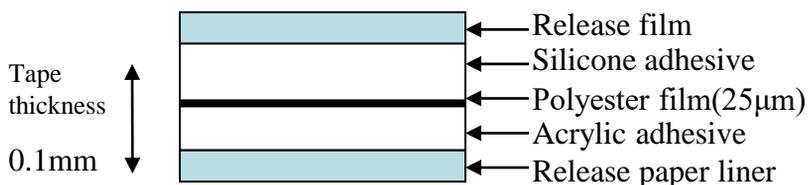

CHARACTERISTIC

- Differential type with silicone adhesive on one side and acrylic adhesive on the other
- Easy releasing of release film provide excellent workability
- Excellent insulation

APPLICATION

- Suitable for bonding silicone rubber parts of electrical and electronics devices and other difficult to bond materials

PROPERTY

		unit	#8625HPW	
			Silicone adhesive side	Acrylic adhesive side
Peel strength at 180° angle	SUS	N/20mm	9.8	10.8
	Silicone rubber		5.9	1.0
Holding power (40°C, 1kg)		mm/h	2>	2>
Ball tack		No.	22	6
Release strength at 180° angle		mN/25mm	300	400
Surface resistance		Ω	10 ¹² <	10 ¹² <

STANDARD SIZE

1 0 0 0 mm in max width / 5 0 m in length