


TECHNICAL INFORMATION

Polyester Film Based Double Coated Adhesive Tape

DAITAC #8625UJ-2

CONSTRUCTION

Tape thickness
0.10mm

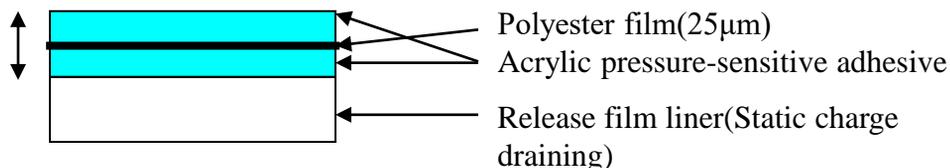

CHARACTERISTIC

- Very strong adhesion
- Antistatic agent in release film liner
- Smoothness, distinct stability and repulsion resistance
- Excellent insulation

APPLICATION

Joining LCD panel to back light module for mobile electronic equipment

PROPERTY

		unit	#8625UJ-2
Peel strength at 180° angle	SUS	N/20mm	20.0
	PC		19.0
	ABS		19.0
	PMMA		19.0
	PET		20.0
Transmittance		%	85<
Holding power	40°C, 1kg	mm/h	1>
Surface resistance		Ω	10 ¹² <

STANDARD SIZE

1 0 0 0 mm in max width / 5 0 m in length

ATTENTION

The trace of air bubble may be visible on an adhesive surface.
This product is not suitable for the use requiring high transparency.

DIC Corporation Composite Material Product div. <http://www.dic-global.com/en/>

Items mentioned in this information are for customers' reference and limited to certain examples although they are based on the most reliable data obtained by our company. It is hoped that customers make the best use of these products after careful examination. Concerning to use and processing the products on this documents, it is not guaranteed a industrial ownerships of a third party. All recipes and processes should be modified, if necessary to conform with particular application.