


TECHNICAL INFORMATION

Polyester Film Based Double Coated Adhesive Tape

DIATAC #8625UJ Black (N)

CONSTRUCTION

Tape thickness
100 μ m

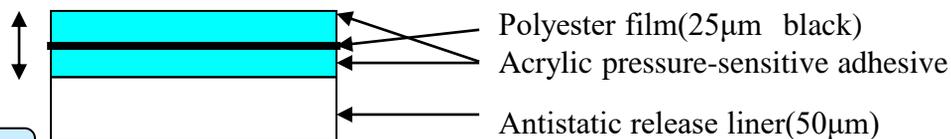

CHARACTERISTIC

- Not use halogenide compounds
- Very strong adhesion, excellent holding power
- Excellent light-shielding power
- Antistatic release film liner
- Smoothness, distinct stability, repulsion resistance

APPLICATION

Joining LCD panel to back light module for mobile electronic equipment

PROPERTY

		unit	#8625UJ Black(N)
Peel strength at 180° angle (JIS Z0237)	SUS	N /20mm	20.0
	PC		19.0
	ABS		19.0
	PMMA		19.0
	PET		20.0
Holding Power(40°C,1kg)		mm/h	1 >
Transmittance of visible ray (JIS K7105)		%	0.1 >

STANDARD SIZE

1000mm in max width / 50m in length