


TECHNICAL INFORMATION

High Impact Resistance Double Coated Adhesive Tape

DAITAC #8810SA-S series

CONSTRUCTION

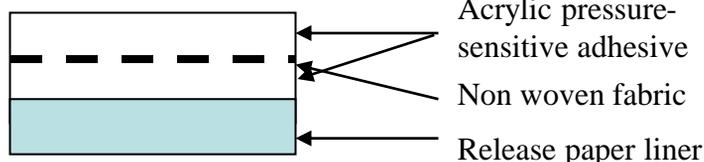

CHARACTERISTIC

- Excellent high impact resistance and adhesion in low temperature
- High processing performance
- Black type also available(#8810SA-Black S)

APPLICATION

- For mobile phone and smart phone
- Adhesion to painted surface (UV -cured)

PROPERTY

	unit	#8810SA -120S	#8810SA -160S	#8810SA -200S	#8810SA -Black S
Thickness	μm	120	160	200	160
Peel strength at 180° angle	SUS ABS N/20mm	11.0 12.0	15.2 13.0	17.0 13.0	15.2 13.0
Push strength	ABS N/4cm ²	90	90	80	90
Holding power (40°C, 1kg)	mm/h	< 2	< 2	< 2	< 2
Impact resistance (DIC method, Load:300g)	ABS Falling height (cm)	70	90	90	90

STANDARD SIZE

1,200 mm in max width / 50 m in length