


## Toluene and xylene free double coated adhesive tape

# DAITAC #8810TD

### CONSTRUCTION

Tape thickness  
0.14mm

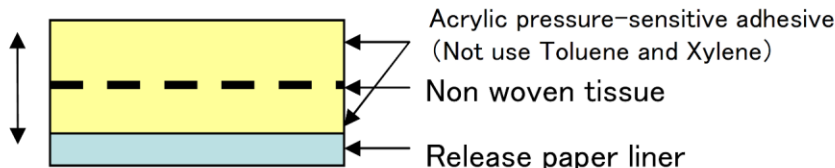

### CHARACTERISTIC



- Not use Toluene and xylene.  
Not use fourteen chemical substances specified by Ministry of Health, Labour and Welfare (Japan).



- Excellent adhesive strength to various plastic material and metal
- Good heat resistance and weather resistance

### APPLICATION

- For interior materials of Automobile
- For bonding polyurethane foam, polyethylene foam
- For various interior building materials (with the adhesive agent)
- For many kind of parts used in electrical and electronics industry

### PROPERTY

		unit	# 8 8 1 0 T D
Peel strength at 180° angle	S U S	N / 20mm	1 6 . 0
	A B S		1 5 . 0
	P P		1 3 . 0
Holding power	40°C, 1kg	mm / h	1 >
Adhesive strength at 90° angle and constant stress	SUS	mm / h	9
	ABS		9

### STANDARD SIZE

1 0 6 0 mm in max width / 5 0 m in length