


# TECHNICAL INFORMATION

Excellent Adhesion non-woven Based Double Coated Adhesive Tape

## DAITAC #8840ER

### Construction

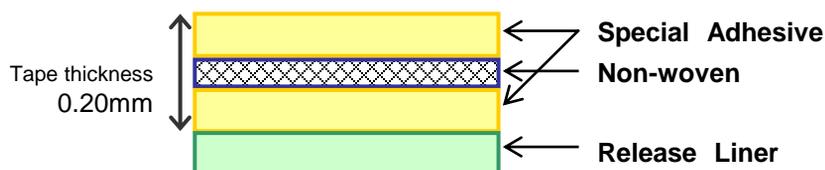

### Characteristics

- ◆ Excellent adhesion and repulsion resistance.
- ◆ Excellent adhesion to polyolefin plastic ,rubber materials and thermoplastic elastomers.

\*Caution: There is a possibility that adhesion of this tape decrease by migrated substances from rubber. Please evaluate practical use appropriately to confirm this adhesive tape suits your usage.

### Applications

- ◆ For bonding a variety of materials for industry.
- ◆ For bonding various rubber parts for cushion, grip and so on, used in the electric equipment.

		Unit	#8840ER
<b>Tape thickness</b>		[mm]	<b>0.14</b>
<b>Peel strength</b>	SUS (hairline)	[N/20mm]	<b>29.4</b>
	Al		<b>30.0</b>
	ABS		<b>27.0</b>
	PMMA		<b>25.0</b>
	PC		<b>27.0</b>
	PS		<b>28.0</b>
	PP		<b>27.0</b>
	CR Rubber		<b>8.0</b>
	EPDM Rubber		<b>10.0</b>
<b>Holding power</b>	40°C 500g/4cm <sup>2</sup>	[hour]	<b>24&lt;</b>

### Size

Maximum width is 1060mm. Standard length is 50m.