


TECHNICAL INFORMATION

Excellent Adhesion non-woven Based Double Coated Adhesive Tape

DAITAC #8840ERS-200

Construction

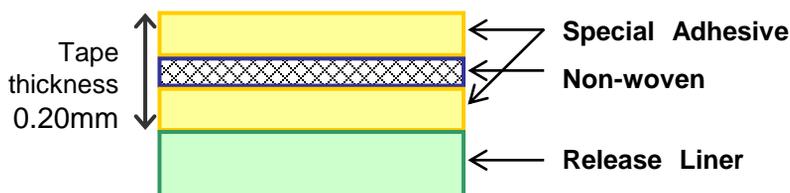

Characteristics

- ◆ Excellent adhesion and repulsion resistance.
- ◆ Excellent adhesion to Metal , Polyolefin plastic , and glass.

*Caution: There is a possibility that adhesion of this tape decrease by migrated substances from rubber. Please evaluate practical use appropriately to confirm this adhesive tape suits your usage.

Applications

- ◆ For bonding a variety of materials for industry.

Properties

		Unit	#8840ERS-200
Tape thickness		[mm]	0.20
Peel strength	SUS(hairline)	[N/20mm]	34.0
	ABS		35.4
	PC/ABS		32.0
	PP		32.3
	PPE/PS		32.0
	HIPS		32.0
	glass		31.1
Shear strength	SUS(hairline)	[N/4cm ²]	465
	ABS		453
	PC/ABS		348
	PP		365
	PPE/PS		493
	HIPS		480
	glass		422
Holding power	40°C 500g/4cm ²	[hour]	24<

Size

Maximum width is 1060mm. Standard length is 50m.