


## Low VOC type double coated adhesive tape

# DAITAC AD-140E

### Construction

Tape thickness  
0.140mm

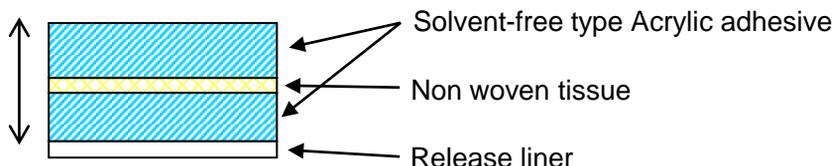

### Characteristic

(\*) : volatile organic compounds

- Tape of non-solvent acrylic adhesive with few VOC \* formation and less odor.
- Fourteen chemical substances specified by Ministry of Health, Labour and Welfare (Japan) are all free for materials.
- Excellent adhesive strength to various plastic material and metal, polyurethane foam.
- Excellent initial adhesion and low-temperature adhesion.
- Good repulsion resistance.

### Application

- For bonding a variety of materials in the automotive and electrical industry.
- For bonding various foams and felts.

### Property

		Unit	AD-140E
Peel strength at 180° angle	Stainless steel (SUS)	N/20mm	15
	Polypropylene (PP)		14
	Polyurethane foam		>3 Form broken

### Standard size

1030 mm in max width / 50 m in length