


TECHNICAL INFORMATION

Thin electrically conductive double coated adhesive tape

DAITAC CDW25

Construction

Tape thickness
0.025mm

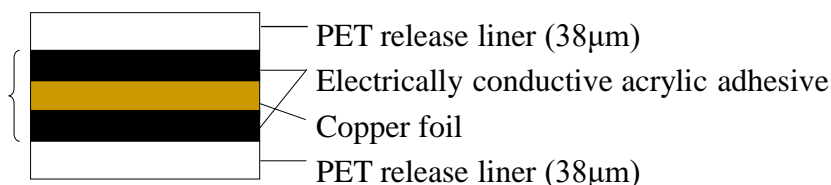

Characteristic

- *Very thin! Tape thickness is 0.025mm.*
- *Excellent electrical conductivity in XYZ direction.*


Application

- *For grounding static electricity.*
- *For EMI shielding of electronic equipment.*


Property

	Units	CDW25
Tape thickness	mm	0.025
180° Peel Strength (SUS)	N/20mm	9.0
Electrical Conductivity :Pressure Method	$\Omega/6.25\text{cm}^2$	0.01
Electrical Conductivity :Attached Method	$\Omega/6.25\text{cm}^2$	0.01
Holding power :100°C100g	h	24<

Pressured method



Attached method



Standard Size

1000 mm in max width / 50 m in length