


## Copper foil adhesive tape

# DAITAC E-O100LC Series

### Construction

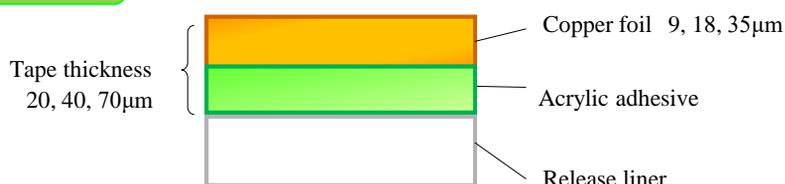

### Characteristic

- Three thickness lineup.
- Excellent adhesive strength.
- E-2100LC is approved UL510FR(FILE No.:E-167390)

### Application

- For EMI shielding of electronic equipment.

### Property

		Units	E-0100LC	E-1100LC	E-2100LC
Tape thickness		µm	20	40	70
Adhesion	(SUS)	N/25mm	16.0	16.7	17.6
	(ABS)		15.0	16.7	17.1
	(PET)		15.0	16.7	17.4
	(PC)		15.0	16.7	17.9
Holding power :70°C 0.5kg		h	24<	24<	24<

### Size

- 1000mm in max width / 50m in length