


## Electrical conductive copper foil tape for EMI shielding

### DAITAC E-2300ND-2

#### CONSTRUCTION

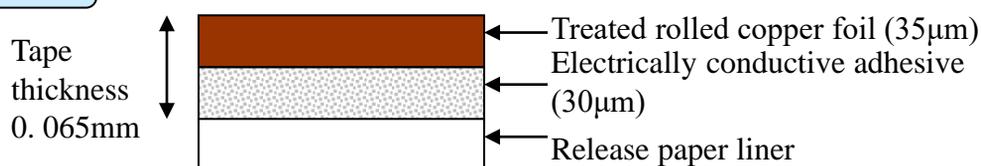

#### CHARACTERISTIC

- Excellent for EMI shielding
- Good electrical conductivity in thickness direction.
- Flexible foil makes bending better.



#### APPLICATION

- For EMI shielding of electronic equipment.
- For EMI shielding of cable, connector, printed circuit board, etc.

#### PROPERTY

		Unit	E-2300ND
Peel adhesion at 180° angle	SUS※	N/25mm	12.0
Holding power	70°C, 0.5kg	hour	>24
Electrical conductivity (DIC method)	Pressured method	$\Omega / 6.25\text{cm}^2$	0.01
	Attached method	$\Omega / 6.25\text{cm}^2$	0.03

※SUS: Hairline surface

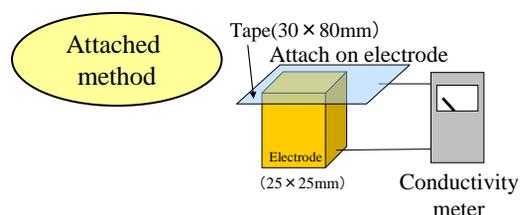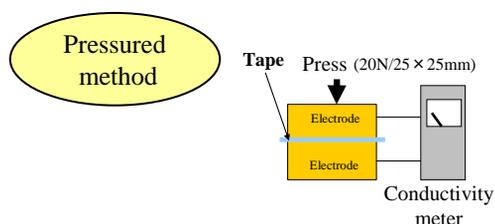

#### STANDARD SIZE

500 mm in max width / 50 m in length