


TECHNICAL INFORMATION

Hard coated polyester film

DICTAT HC6100SF-DP2

Construction

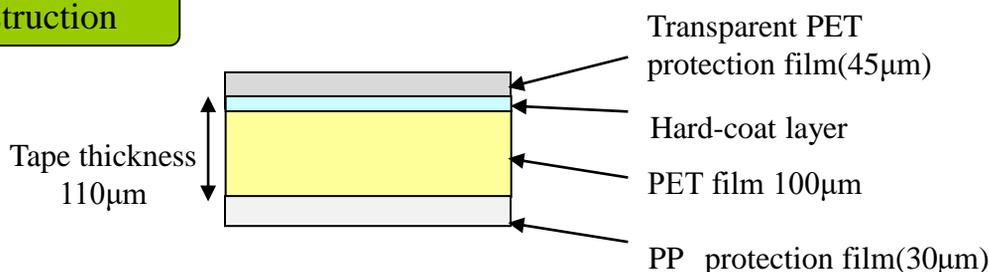

Characteristics

- Finger print on hard-coated layer can be easily removed.
- Good wear resistance.
- Excellent slippery.

※For fixing HC6100SF-DP2 to glass panel, we recommend DAITAC ZB series; optically clear adhesive tape.

Property

	Unit	HC6100SF –DP2
Thickness	µm	110
Pencil hardness *film only (Load 750g)	—	2-3H
Wear resistance (Steel wool #0000,500g/cm ² ,)	—	20,000 times
Transparency of visible ray τ _t	%	91
Haze(JIS K7136) *film only	%	1.0
Haze(JIS K7136) *film/15µOCA/glass	%	0.5
Slippery	—	Excellent
Contact Angle	Degree	108

size

Max width:990mm STD Length:100m

※Semi Standard Product