


Light Shielding Single Coated Adhesive Tape

DAITAC LS-025H(N)

CONSTRUCTION

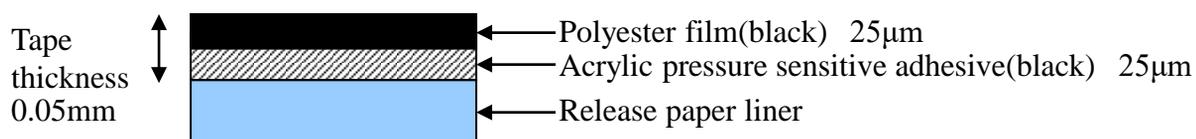

CHARACTERISTIC

- Halogen free
- Excellent light blocking
- Excellent adhesion and stability
- Good insulation

APPLICATION

- Light blocking material such as for LCD, camera module, etc.

PROPERTY

Test item	Units	LS-025H(N)	Method
Tape thickness	µm	50.0	JIS Z0237
Adhesion (SUS)	N/25mm	11.0	JIS Z0237
OD Value	—	>5	DIC Method

STANDARD SIZE 960 mm in max width / 50 m in length

DIC Corporation Composite Material Product div. <http://www.dic-global.com/en/>

•The information contained herein are reference based on careful tests and accurate to best knowledge, but not guaranteed specification. All recipes and processes should be modified, if necessary to conform with particular application. We may change the materials without approval so that please contact the follow address before use. Concerning to use and processing the products on this documents, it is not guaranteed a industrial ownerships of a third party.