


Thin type Foam Based Double Coated Adhesive Tape

DAITAC NDS300

Construction

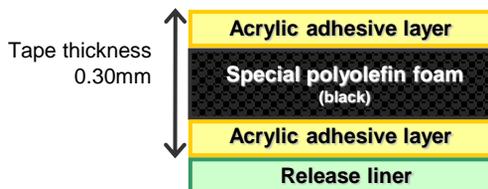

Characteristics

- ◆ Excellent adhesion, durability and impact resistance
- ◆ Good adhesion to rough surface
- ◆ Good workability for die-cut and lamination
- ◆ Easily-removable

Applications

For water-proof equipments such as mobile phone, tablet PC, and digital camera

For bonding rigid materials such as reinforced plastic, metal, and glass panel

Properties

		Unit	NDS300
Tape thickness		[μ m]	300
Peel strength (Conform to JIS Z0237)	SUS (hairline)	[N/20mm]	18.0
	ABS		20.0
Push adhesive strength (DIC method)	ABS	[N/4cm ²]	180
Holding power (Conform to JIS Z0237)	70°C 500g/4cm²	[hour]	24<
Impact resistance (DIC method)	ABS 300g	Height [cm]	100<
Waterproof (Conform to JIS C0920, IPX8)	Flat surface	10m 30min	Good
	Uneven surface (30 μ m)		Good

Size

860mm in max width / 50m in length