


Surface protective film with antistatic properties

PACHICUT PET50SER

Construction

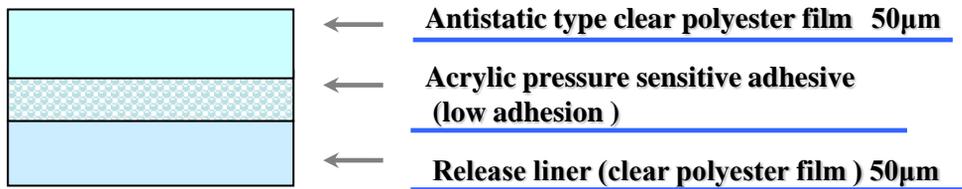

Characteristic



- Stable low adhesion for metals, various plastics, and glass materials.
- Changes in adhesion after attached are very small, ensuring easy peeling.
- Easy apply to materials, because of polyester film 50µm.



- Stable antistatic effect on protective film itself.



- Transparent backing film allows appearance of attached materials.

Application

- Surface protective film for display panels of electric products
ex) cellular phone, appliance, car-mounted navigation, audio system, computer games
- Removable sheet in manufacturing process and carrier of various industrial parts
ex) FPC, LCD parts

Property

Terms		Values		Testing Methods
		23°C50%RH × 1	60°C × 3	
Adhesive Strength [N/25mm]	SUS(hairline) plate	^h 0.10	days 0.24	180° peeling (Based on JIS Z-0237-2000)
	PMMA plate	0.17	0.20	
	Glass plate	0.10	0.11	
Removability	SUS (hairline) plate	Good		Kept condition 60°C × 3 days
	PMMA plate	Good		
	Glass plate	Good		

Max Width

1090 mm