


Polyester Film Based Adhesive Tape

DAITAC PFseries

CONSTRUCTION

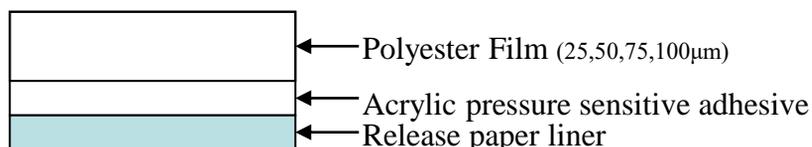

CHARACTERISTIC

- Good heat resistance, weathering resistance.
- Excellent adhesion, stability.
- Good electrical insulating.

APPLICATION

- For some industrial material, insulation.

PROPERTY

	Unit	PF-025H	PF-050H	PF-075H	PF-100H
Tape thickness	mm	0.06	0.085	0.11	0.135
Peel strength at 180° angle	SUS	14.0	17.6	17.6	19.1
	PET	13.2	17.5	17.2	18.1
	ABS	12.7	16.7	16.7	17.6
	PC	13.7	17.6	17.2	18.6
	PP	11.4	13.7	13.7	14.7
Holdig power (70°C, 0.5kg)	mm/h.	2 >	2 >	2 >	2 >
Ball tack (23°C)	No.	4	4	4	4
Surface resistance	Ω	> 10 ¹⁴	> 10 ¹⁴	> 10 ¹⁴	> 10 ¹⁴
Volume resistance	Ω · cm	> 10 ¹⁴	> 10 ¹⁴	> 10 ¹⁴	> 10 ¹⁴

STANDARD SIZE

1000 mm in max width / 50 m in length

DIC Corporation Composite Material Product div. <http://www.dic-global.com/en/>

Items mentioned in this information are for customers' reference and limited to certain examples although they are based on the most reliable data obtained by our company. It is hoped that customers make the best use of these products after careful examination. Concerning to use and processing the products on this documents, it is not guaranteed a industrial ownerships of a third party. All recipes and processes should be modified, if necessary to conform with particular application.