


TECHNICAL INFORMATION

Foam Based Double Coated Adhesive Tape

DAITAC STA400

Construction

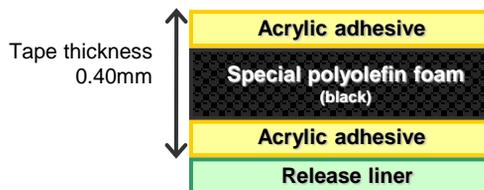

Characteristics

- ◆ Excellent adhesion and durability
- ◆ Good adhesion to rough surface
- ◆ Good workability for die-cut and lamination
- ◆ Non Toluene and Xylene, Not use fourteen chemical substances specified by Ministry of Health, Labour and Welfare (Japan).

Applications

For bonding rigid materials such as reinforced plastic, metal, and glass panel

Properties

		Unit	STA400
Tape thickness		[μm]	400
Peel strength (Conform to JIS Z0237)	SUS (Hairline)	[N/20mm]	18.0
	PC		18.0
Holding power (Conform to JIS Z0237)	70°C 500g/4cm ²	[hour]	24<

Size

Please ask our staff.