

TECHNICAL DATA SHEET



DIC PSAs
web page




4A19A5 E Color & Comfort

Aluminum foil adhesive tape for EMI shielding

DAITAC® 52050LA

■ Construction

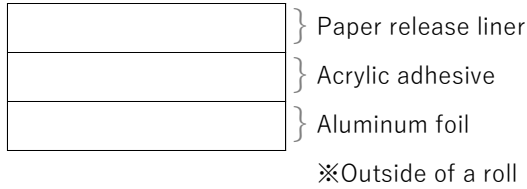

■ Characteristics

- ✓ Excellent EMI shielding
- ✓ Good thermal conductivity
- ✓ Excellent adhesion

■ Applications

- ✓ For EMI shielding of electronic equipment.
- ✓ For heat spread application.

■ Properties

Test item	Condition	Substrate	Unit	52050LA
Thickness	Except release liner	-	μm	95
180 deg. peel strength	23°C, 1hr	SUS (hairline)	N/25mm	17.6
		AL	N/25mm	16
		ABS	N/25mm	16.1
		PS	N/25mm	16.2
		PC	N/25mm	17.4
		PP	N/25mm	15.4
Static shear	70°C, 0.5kg	SUS (hairline)	hr	24 <

■ **Remarks** UL510FR certified [File No.E-167390]

■ **Size** 1,000mm in max width 50m in length