

# TECHNICAL DATA SHEET



DIC PSAs  
web page




4A43A1 E Color & Comfort

Aluminum foil adhesive tape for EMI shielding

## DAITAC® 52100LA

### ■ Construction

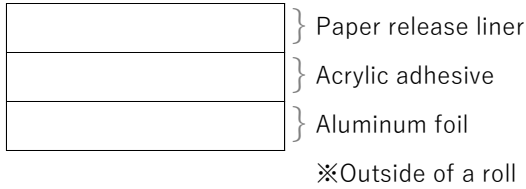

### ■ Characteristics

- ✓ Excellent EMI shielding
- ✓ Good thermal conductivity
- ✓ Excellent adhesion

### ■ Applications

- ✓ For EMI shielding of electronic equipment.
- ✓ For heat spread application.

### ■ Properties

Test item	Condition	Substrate	Unit	52100LA
Thickness	Except release liner	-	μm	145
180 deg. peel strength	23°C, 1hr	SUS (hairline)	N/25mm	19.6
		AL	N/25mm	18.6
		ABS	N/25mm	19
		PS	N/25mm	18.6
		PC	N/25mm	19.9
		PP	N/25mm	17.9
Static shear	70°C, 0.5kg	SUS (hairline)	hr	24 <

■ **Remarks** UL510FR certified [File No.E-167390]

■ **Size** 1,000mm in max width 50m in length