

TECHNICAL DATA SHEET



DIC PSAs
web page




1M64A3 E Color & Comfort

Backing-less double-sided electrically conductive tape

DAITAC® #8035N-2

■ Construction

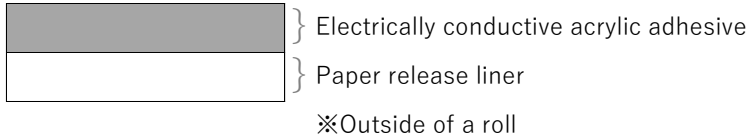

■ Characteristics

- ✓ Carrierless electrically conductive adhesive tape.
- ✓ Excellent electrical conductivity in thickness direction.
- ✓ Product does not intentionally use any of the 10 restricted substances under the RoHS Directive.

■ Applications

- ✓ For conductive parts.

■ Properties

Test item	Condition	Substrate	Unit	#8035N-2
Thickness	Except release liner	-	mm	0.03
180 deg. peel strength	23°C, 1hr	SUS (hairline)	N/20mm	7
Electrical resistance	Pressure method	Copper foil	$\Omega/6.25\text{cm}^2$	0.02
	Attached method	Copper foil	$\Omega/6.25\text{cm}^2$	0.05
Static shear	70°C, 0.5kg	SUS (hairline)	hr	24 <

■ Size 1,000mm in max width 50m in length