

TECHNICAL DATA SHEET



DIC PSAs
web page




0E02A3 E Color & Comfort

Excellent Die-Cuttability Double Coated Adhesive Tape

DAITAC® #8103D-BLACK

Construction

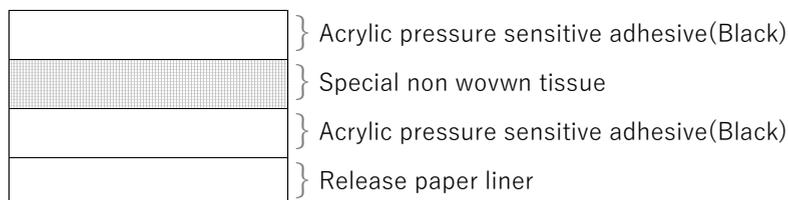

Characteristics

- ✓ · Excellent workability and disassembly due to the use of tough non-woven fabric.
- ✓ · Excellent adhesion to various metal, plastic and foam materials.
- ✓ · Excellent repulsion resistance on curved substrates.
- ✓ · Product does not use the 10 restrictive substances of the RoHS Directive.

Applications

- ✓ · For bonding various electrical equipment.
- ✓ · For bonding various foams and felts.
- ✓ 1060mm in max width / 50m in length

Properties

Test item	Condition	Substrate	Unit	#8103D-BLACK
Thickness	剥離紙を除く	-	μm	0.15
180 deg. peel strength	JIS Z0237準拠	SUS(hairline)	N/20mm	15.2
		ABS	N/20mm	15.2
		HIPS	N/20mm	13.7
		PP	N/20mm	12.5
Static shear	40°C, 1kg	SUS(hairline)	mm/hr	1 >
Ball tack	JIS Z0237準拠	0	No.	8
Static 90 deg. peel strength	23°C, 0.3kg/10mm	SUS(hairline)	mm/hr	9
		ABS	mm/hr	9