

TECHNICAL DATA SHEET



DIC PSAs
web page




0N32A8 E Color & Comfort

Excellent Adhesive Strength Double Coated Adhesive Tape

DAITAC® #810HD

■ Construction

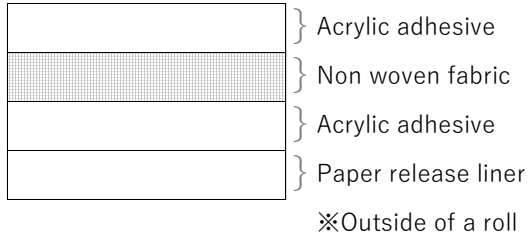

■ Characteristics

- ✓ Excellent adhesion to various metal, plastic and foam materials
- ✓ Excellent repulsion resistance on curved substrates.
- ✓ Good adhesion performance at low and high temperatures.
- ✓ Excellent workability and disassembly due to the use of tough non-woven fabric.
- ✓ Black version(#810HD Black) is also available
- ✓ Product does not intentionally use any of the 10 restricted substances under the RoHS Directive

■ Applications

- ✓ For bonding various electrical equipment
- ✓ For bonding various foams and felts.
- ✓ For bonding various automotive interior materials like cushion.

■ Properties

Test item	Condition	Substrate	Unit	#810HD
Thickness	Except release liner	-	mm	0.145
180 deg. peel strength	23°C, 1hr	SUS (hairline)	N/20mm	15.2
		ABS	N/20mm	14.7
		HIPS	N/20mm	14.2
		PP	N/20mm	12.5
Static shear	40°C, 1kg	SUS (hairline)	mm/hr	< 1
Ball tack	Conform to JIS Z0237	-	No.	8
Static 90 deg. peel strength	23°C, 0.3kg/10mm	SUS (hairline)	mm/hr	9
		ABS	mm/hr	9

■ **Remarks** UL969 certified [File No.MH-12834]

■ **Size** 1,060mm in max width 50m in length

DIC Corp.

Composite Solutions BU

https://www.dic-global.com/en/products/adhesive_tapes/

Please note that the data provided in this catalog (the "Catalog") is offered for informational purposes only, and serves as an example of previously measured values and not guaranteed values. DIC Corporation ("DIC") does not and shall not guarantee suitability and compatibility of the Products and the materials that the buyer will incorporate the Products with. Please note that prior to any use of the products stated in the Catalog (the "Products"), it is the buyer's responsibility to confirm the suitability and compatibility of the Products and the materials that the buyer will incorporate the Products with. DIC may modify the specifications of the Products stated in the Catalog at any time and at DIC's sole discretion prior to any use of the products. DIC shall not be liable for any infringement on any third parties' intellectual property rights resulting from the Products' existence, sale, use, combination with any materials, or any other applications or the Products thereof. DIC is the owner of the copyright associated with this Catalog. Copying and/or reprinting this Catalog without obtaining prior permission in writing from DIC is strictly prohibited.