

TECHNICAL DATA SHEET



DIC PSAs
web page




0H24A3 E Color & Comfort

Excellent initial adhesion Double Coated Adhesive Tape

DAITAC® #8150-4

Construction

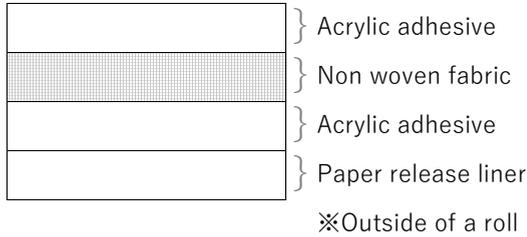

Characteristics

- ✓ Great initial bonding even at low temperatures.
- ✓ Excellent adhesion to various foam, felt, metal and plastic materials
- ✓ Product does not intentionally use any of the 10 restricted substances under the RoHS Directive.

Applications

- ✓ For bonding various foam
- ✓ For bonding various nameplate
- ✓ For stationery and office work

Properties

| Test item | Condition | Substrate | Unit | #8150-4 |
|------------------------|----------------------|---------------|--------|---------|
| Thickness | Except release liner | - | mm | 0.135 |
| 180 deg. peel strength | Conform to JIS Z0237 | SUS(hairline) | N/20mm | 13.7 |
| | | AL | N/20mm | 13.7 |
| | | ABS | N/20mm | 13.7 |
| | | PP | N/20mm | 12.7 |
| Static shear | 40°C, 1kg | SUS(hairline) | mm/hr | < 2 |
| Ball tack | Conform to JIS Z0237 | - | No. | 12 |

Size 1,060mm in max width 50m in length