

TECHNICAL DATA SHEET



DIC PSAs
web page




0Q16A4 E Color & Comfort

Excellent initial adhesion Double Coated Adhesive Tape

DAITAC® #815GT

■ Construction

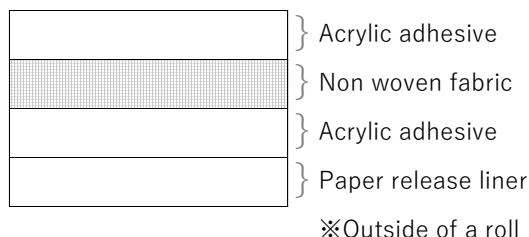

■ Characteristics

- ✓ Great initial bonding even at low temperatures.
- ✓ Excellent adhesion to various foam, felt, metal and plastic materials
- ✓ Good repulsion resistance. Maintains excellent adhesion to foam and felt materials in flexing/bending applications.
- ✓ Product does not use the 6 restrictive substances of the RoHS Directive.

■ Applications

- ✓ For bonding various foam
- ✓ For bonding various nameplate
- ✓ For stationery and office work

■ Properties

Test item	Condition	Substrate	Unit	#815GT
Thickness	Except release liner	-	mm	0.14
180 deg. peel strength	23°C, 1hr	SUS (hairline)	N/20mm	13.7
		ABS	N/20mm	14
		PC	N/20mm	13.2
		PP	N/20mm	12.4
Static shear	40°C, 1kg	SUS (hairline)	mm/hr	< 2
Ball tack	Conform to JIS Z0237	-	No.	12

■ **Remarks** UL969 certified [File No.MH-12834]

■ **Size** 1,060mm in max width 50m in length

DIC Corp.

Composite Solutions BU

https://www.dic-global.com/en/products/adhesive_tapes/

Please note that the data provided in this catalog (the "Catalog") is offered for informational purposes only, and serves as an example of previously measured values and not guaranteed values. DIC Corporation ("DIC") does not and shall not guarantee suitability and compatibility of the Products and the materials that the buyer will incorporate the Products with. Please note that prior to any use of the products stated in the Catalog (the "Products"), it is the buyer's responsibility to confirm the suitability and compatibility of the Products and the materials that the buyer will incorporate the Products with. DIC may modify the specifications of the Products stated in the Catalog at any time and at DIC's sole discretion prior to any use of the products. DIC shall not be liable for any infringement on any third parties' intellectual property rights resulting from the Products' existence, sale, use, combination with any materials, or any other applications or the Products thereof. DIC is the owner of the copyright associated with this Catalog. Copying and/or reprinting this Catalog without obtaining prior permission in writing from DIC is strictly prohibited.