

TECHNICAL DATA SHEET



DIC PSAs
web page




1S94A1 E Color & Comfort

Thin type Foam Based Double Coated Adhesive Tape

DAITAC® #8402TD-150

■ Construction

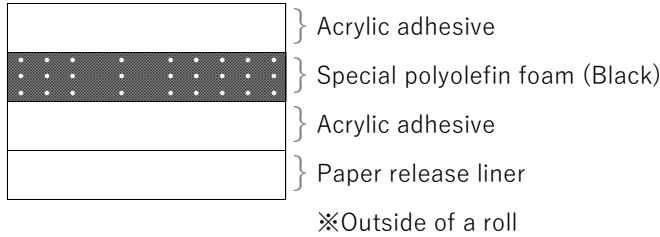

■ Characteristics

- ✓ Excellent adhesion and durability
- ✓ Does not use substances(Toluene etc.) listed in the "Indoor Concentration Guidelines for Chemical Substances" formulated by the Ministry of Health, Labour and Welfare of Japan.
- ✓ Good conformability
- ✓ Good workability for die-cutting and lamination
- ✓ Product does not intentionally use any of the 10 restricted substances under the RoHS Directive.

■ Applications

- ✓ For bonding rigid materials like reinforced plastic, metal and glass panel

■ Properties

Test item	Condition	Substrate	Unit	#8402TD-150
Thickness	Except release liner	-	μ m	150
180 deg. peel strength	23°C, 1hr	SUS (hairline)	N/20mm	15
		PC	N/20mm	15
Static shear	70°C, 0.5kg	SUS(hairline)	hr	24<

■ **Size** 980mm in max width 50m in length