

# TECHNICAL DATA SHEET



DIC PSAs  
web page




1S90A3 E Color & Comfort

Thin type Foam Based Double Coated Adhesive Tape

## DAITAC® #8402TD

### ■ Construction

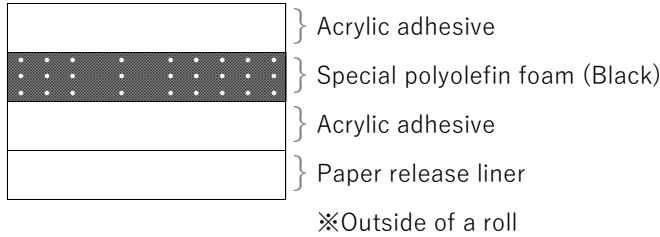

### ■ Characteristics

- ✓ Excellent adhesion and durability
- ✓ Does not use substances (Toluene etc.) listed in the "Indoor Concentration Guidelines for Chemical Substances" formulated by the Ministry of Health, Labour and Welfare of Japan.
- ✓ Good conformability
- ✓ Good workability for die-cutting and lamination
- ✓ Product does not intentionally use any of the 10 restricted substances under the RoHS Directive.

### ■ Applications

- ✓ For bonding rigid materials like reinforced plastic, metal and glass panel

### ■ Properties

Test item	Condition	Substrate	Unit	#8402TD
Thickness	Except release liner	-	μm	200
180 deg. peel strength	23°C, 1hr	SUS (hairline)	N/20mm	15
		PC	N/20mm	15
Static shear	70°C, 0.5kg	SUS(hairline)	hr	24<

■ **Size**                      980mm in max width                      50m in length