

# TECHNICAL DATA SHEET



DIC PSAs  
web page




1S16A6 E Color & Comfort

Foam Based Double Coated Adhesive Tape

## DAITAC® #8404TD Black

### ■ Construction

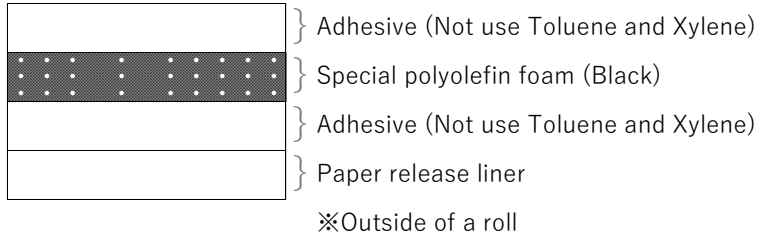

### ■ Characteristics

- ✓ Does not use substances (Toluene etc.) listed in the "Indoor Concentration Guidelines for Chemical Substances" formulated by the Ministry of Health, Labour and Welfare of Japan.
- ✓ Excellent conformability
- ✓ Good lamination workability
- ✓ Product does not intentionally use any of the 10 restricted substances under the RoHS Directive.

### ■ Applications

- ✓ For bonding various automotive interior materials.
- ✓ Great use for bonding nameplates and manufactured plastic parts.

### ■ Properties

Test item	Condition	Substrate	Unit	#8404TD Black
Thickness	Except release liner	-	μm	400
180 deg. peel strength	Conform to JIS Z0237	SUS (hairline)	N/20mm	19.6
		PC	N/20mm	19.6
Static shear	70°C, 0.5kg	SUS (hairline)	hr	24 <

■ **Size**                      980mm in max width                      30m in length