

# TECHNICAL DATA SHEET



DIC PSAs  
web page




1S62A1 E Color & Comfort

Foam Based Double Coated Adhesive Tape

## DAITAC® #8408BLACK

### ■ Construction

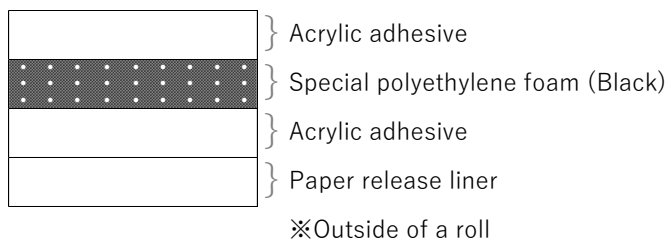

### ■ Characteristics

- ✓ Excellent conformability
- ✓ Excellent adhesion
- ✓ Moderate tensile strength which gives it excellent workability when laminating.
- ✓ Product does not use the 6 restrictive substances of the RoHS Directive.

### ■ Applications

- ✓ Used in application such as bonding items in TV or mobile device
- ✓ For bonding various automotive interior materials.
- ✓ For bonding various materials, nameplate

### ■ Properties

Test item	Condition	Substrate	Unit	#8408BLACK
Thickness	Except release liner	-	mm	0.8
180 deg. peel strength	Conform to JIS Z0237	SUS (hairline)	N/20mm	19.6
		ABS	N/20mm	19.6
		PP	N/20mm	11.8
Dynamic Shear Strength	-	SUS (hairline)	N/cm <sup>2</sup>	88
Static shear	40°C, 1kg	SUS (hairline)	mm/hr	< 2

■ **Remarks** For waterproof application, please refer to TDS (No.1S52A5J)

■ **Size** 960mm in max width 10m in length