TECHNICAL DATA SHEET



DIC PSAs web page




1M66A5 E Color & Comfort

Electrically conductive double coated adhesive tape

DAITAC® #8530AD

Construction

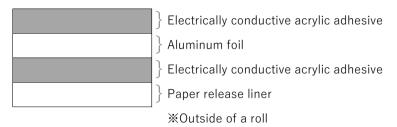

Characteristics

- ✓ Excellent electrical conductivity in thickness direction.
- √ Excellent adhesion
- ✓ Product does not use the 6 restrictive substances of the RoHS Directive.

Applications

- √ For grounding static electricity.
- √ For EMI shielding of electronic equipment.

Properties

Test item	Condition	Substrate	Unit	#8530AD
Thickness	Except release liner	-	mm	0.09
180 deg. peel strength	Conform to JIS Z0237	SUS (hairline)	N/20mm	9.8
		ABS	N/20mm	10.3
		PET	N/20mm	9.8
Electrical resistance	Pressure method	Copper foil	$\Omega/6.25$ cm²	0.03
	Attached method	Copper foil	$\Omega/6.25$ cm²	80.0
Static shear	70°C, 0.5kg	-	hr	24 <

Size

1,000mm in max width

50m in length