

TECHNICAL DATA SHEET



DIC PSAs
web page




1N32A2 E Color & Comfort

Very thin double coated adhesive tape

DAITAC® #8606TN

■ Construction

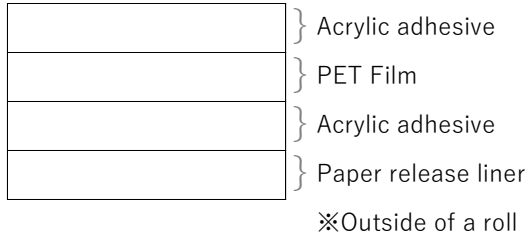

■ Characteristics

- ✓ Tape thickness is 30 μ m.
- ✓ Good die-cutting workability
- ✓ Good workability.
- ✓ Product does not intentionally use any of the 10 restricted substances under the RoHS Directive.

■ Applications

- ✓ For attaching thin sheet for mobile electronic equipment.
- ✓ For bonding heat dissipating material such as graphite sheet.
- ✓ For attaching magnetic sheet.

■ Properties

Test item	Condition	Substrate	Unit	#8606TN
Thickness	Except release liner	-	μ m	30
180 deg. peel strength	23°C, 1hr	SUS (hairline)	N/20mm	7
Static shear	40°C, 1kg	SUS (hairline)	mm/hr	< 2

■ Size 1,000mm in max width 50m in length